

MOLETRAC

Ortungstechnik




MÖGLICH MIT SUBSITE ELECTRONICS

Model	Part Number	Diameter in (mm)	Length in (cm)	Weight lb (kg)	Air cfm (L/min)	Pressure psi (bar)
2.50" (67) RH SR MT	ET26222	2.64 (67)	53.60 (136.1)	52 (24)	31 (878)	110 (7.6)
2.50" (67) RH PP DF MT	ET26322	2.64 (67)	52.80 (98.8)	51 (23)	31 (878)	110 (7.6)
2.50" (67) RH PP SW MT	ET26722	2.64 (67)	39.86 (101.2)	35 (16)	21.5 (609)	110 (7.6)
3.00" (75) RH SR MT	ET30322	3.00 (75)	56.80 (144.3)	68 (31)	32 (906)	110 (7.6)
3.00" (75) RH PP DF MT	ET31422	3.00 (75)	55.80 (141.7)	66 (30)	35 (991)	110 (7.6)
3.00" (75) RH PP SW MT	ET30322	3.00 (75)	47.56 (120.8)	54 (24)	33 (934)	110 (7.6)
3.50" (89) RH PP DF MT	ET35222	3.50 (89)	61.60 (156.5)	96 (44)	53.5 (1,515)	110 (7.6)
4.00" (98) RH PP DF MT	ET40522	3.88 (98)	66.60 (169.2)	133 (60)	64 (1,812)	110 (7.6)
4.00" (98) RH SR MT	ET38322	3.88 (98)	67.60 (171.7)	132 (60)	68 (1,926)	110 (7.6)
5.50" (140) SR BU MT	ET58122	5.50 (140)	67.60 (171.7)	169 (77)	68 (1,926)	110 (7.6)

RH: wechselbarer Kopf / SR: drehen-zurück / PP: Power Port / SW: Sidewalker /BL: ohne Bolzen / DF: Schmutzfrei, BU: Bauchig / MT: Moletrac





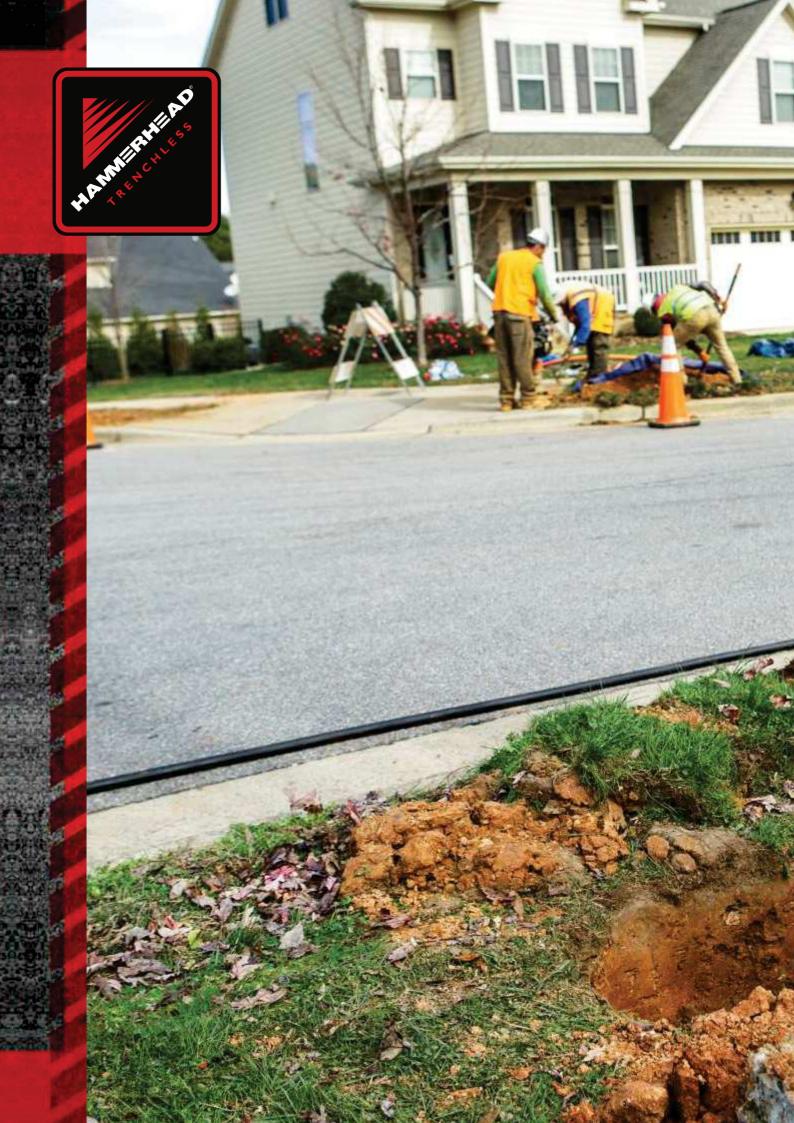



Bodendurchschlagsraketen mit erwiderndem Kopf

Catamount und Aktivkopf





CATAMOUNT UND AKTIVKOPF

Modell	Ersatzteil- nummer	Durchmesser in (mm)	Länge in (cm)	Gewicht lb (kg)	Luft cfm (L/min)	Druck psi (bar)
2.00" (50) AH PP SW BL	ET21744	2.00 (50)	30.24 (76.8)	19 (8.6)	15 (425)	110 (7.6)
2.00" (50) AH PP BL	ET21722	2.00 (50)	40.88 (103.8)	24 (11)	18 (510)	110 (7.6)
2.50" (67) CMT PP DF	ET26022	2.64 (67)	49.3 (125.2)	50 (23)	31 (878)	110 (7.6)
2.50" (67) AH PP DF	ET25922	2.64 (67)	49.9 (126.7)	50 (23)	31 (878)	110 (7.6)
3.00" (75) CMT PP DF	ET30822	3.00 (75)	50.6 (128.6)	69 (31)	32 (906)	110 (7.6)
3.00" (75) AH PP DF	ET31022	3.00 (75)	52.5 (133.4)	67 (30)	35 (991)	110 (7.6)
3.50" (89) CMT PP DF	ET35122	3.50 (89)	59.0 (149.9)	99 (45)	53.5 (1,515)	110 (7.6)
4.00"(100) CMT PP DF	ET40322	3.96 (100)	65.8 (167)	148 (67)	65 (1,840)	110 (7.6)
4.375" (111) CMT PP DF	ET43222	4.38 (111)	62.44 (158.6)	180 (82)	90 (2,549)	110 (7.6)
5.125" (130) CMT PP DF	ET51322	5.13 (130)	71.7 (182.0)	257 (117)	160 (4,530)	110 (7.6)

AH: Aktivkopf / CMT: Catamount / PP: Power Port / SW: Sidewalker / BL: ohne Bolzen / DF: Schmutzfrei
















INSTALLATION VON KANAL, WASSER, GAS, ELEKTRIK, GLASFASER, BEWÄSSERUNG UND KABEL

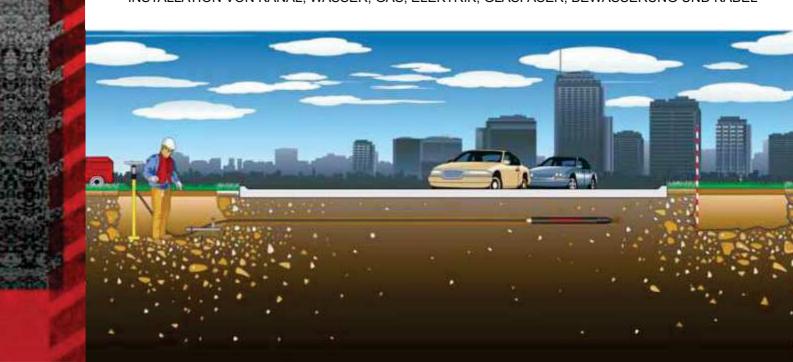



DIE KLASSIKER

Modell	Ersatzteil- nummer	Durchmesser in (mm)	Länge in (cm)	Gewicht lb (kg)	Luft cfm (L/min)	Druck psi (bar)
2.00" (50) RH SR	ET20222	2.06 (50)	45.3 (115)	28 (13)	22 (623)	110 (7.6)
2.00" (50) RH PP BL	ET21733	2.06 (50)	39.0 (99.1)	24 (11)	18 (510)	110 (7.6)
2.50" (67) RH SR	ET25222	2.64 (67)	48.25 (122.6)	50 (23)	31 (878)	110 (7.6)
2.50" (67) RH PP DF	ET25522	2.64 (67)	48.25 (122.6)	50 (23)	31 (878)	110 (7.6)
2.50" (67) RH PP SW DF	ET26622	2.64 (67)	33.9 (86.1)	31 (14)	21.5 (609)	110 (7.6)
3.00" (75) RH SR	ET30222	3.00 (75)	52.18 (132.5)	67 (30)	32 (906)	110 (7.6)
3.00" (75) RH PP DF	ET31222	3.00 (75)	51.7 (131.3)	67 (30)	35 (991)	110 (7.6)
3.00" (75) RH PP SW DF	ET31622	3.00 (75)	41.6 (105.7)	50 (23)	33 (934)	110 (7.6)
3.50" (89) RH PP DF	ET35022	3.50 (89)	59.0 (149.9)	94 (43)	53.5 (1,515)	110 (7.6)
4.00" (98) RH PP DF	ET40422	3.88 (98.43)	62.8 (159.5)	131 (59)	64 (1,812)	110 (7.6)
4.00" (98) RH SR	ET38222	3.88 (98)	63.95 (162.4)	136 (62)	68 (1,926)	110 (7.6)
5.125" (130) SR	ET51222	5.125 (133)	65.92 (167.4)	214 (97)	98 (2,775)	110 (7.6)
5.125" (130) PP DF	ET51422	5.25 (133.4)	64.8 (164.6)	244.8 (111)	160 (4,531)	110 (7.6)
5.50" (140) SR BU	ET58222	5.50 (140)	63.95 (162.4)	170 (77)	68 (1,926)	110 (7.6)
5.625" (143) PP BU DF	ET51722	5.63 (142.9)	64.8 (164.6)	247.9 (113)	160 (4,531)	110 (7.6)
5.75" (145) SR	ET60222	5.88 (149)	79.5 (201.9)	305 (138)	132 (3,738)	110 (7.6)

RH: wechselbarer Kopf / SR: drehen-zurück / PP: Power Port / BL: ohne Bolzen / DF: Schmutzfrei, BU: Bauchig



TOUGH. TRUSTED. TRENCHLESS.

